

Search for supersolidity in ^4He in low-frequency sound experiments.

Yu. Mukharsky, O. Avenel, and E. Varoquaux*

*CEA-DRECAM, Service de Physique de l'État Condensé,
Centre d'Études de Saclay, 91191 Gif-sur-Yvette Cedex (France)*

**CNRS-Laboratoire de Physique des Solides,
Bât. 510, Université Paris-Sud, 91405 Orsay (France)*

We present results of the search for supersolid ^4He using low-frequency, low-level mechanical excitation of a solid sample grown and cooled at fixed volume. We have observed low frequency non-linear resonances that constitute anomalous features. These features, which appear below $\sim 0.8\text{ K}$, are absent in ^3He . The frequency, the amplitude at which the nonlinearity sets in, and the upper temperature limit of existence of these resonances depend markedly on the sample history.

1. Introduction

The observation of an anomalous behaviour in the moment of inertia of solid ^4He first reported by Kim and Chan^{1,2} have recently been confirmed by a number of different groups using the same torsional oscillator technique, Keiya Shirahama *et al.* from Keio University,³ Minoru Kubota *et al.* from the University of Kyoto,⁴ and Rittner and Reppe from Cornell University.⁵ The last group however reports a marked dependence of the supersolid response upon sample annealing.

Other experiments probing the mechanical properties of solid ^4He at temperatures below 1 K by a number of different techniques have concluded, with increasing certainty as the techniques were refined, that no *dc* superflow was taking place on a scale that would match that reported by Kim and Chan (see ⁶ and references therein). A possible exception is a recent gravitational flow experiment conducted on the liquid-solid coexistence curve by Sasaki *et al.*⁷

We report here measurements of the response of solid ^4He samples to

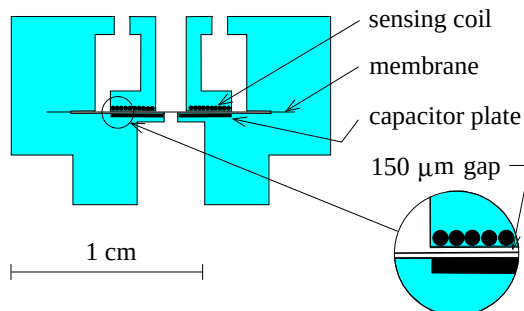


Fig. 1. Schematic view of the experimental cell. The flexible membrane makes a partition between the bottom and the top chambers. As shown in the blown-up view, this membrane is separated by small gaps from the solid walls in which the flat electrodynamic pickup coil (top) and the capacitor counter-electrode (bottom) are embedded.

low-frequency, low-level mechanical excitations that were carried out with the goal of detecting the presence of an eventual supermobile component. It can be expected that such a component would give rise to a hydrodynamic mode with a lower propagation velocity than that of ordinary (first) sound. Such a mode, if associated to a Bose condensate, should show little internal damping at low temperature, and, in all likelihood, should display a critical velocity above which the supermobile property breaks down.

2. The experiment

The experimental cell used in these *ac* stress-strain measurements is built from components of the hydromechanical resonator previously used for phase slippage experiments in the ^4He and ^3He superfluids.^{8,9}

Pressure is applied to the solid by a flexible membrane positioned between two solid walls as shown in Fig.1. The two flat cylindrical chambers above and below the diaphragm have a height of approximately $150\text{ }\mu\text{m}$ and a diameter of 8 mm . The top chamber is open to the main volume of the cell by a 0.6 mm diameter cylindrical vent of height 0.5 mm . The bottom chamber has a larger opening, 1.5 mm in diameter, 5 mm in length. The path around the cell is $\sim 2.6\text{ cm}$ in length. The volume around the cell has largest dimension 3.5 cm . The corresponding $\lambda/2$ resonance frequency for a longitudinal sound velocity of 440 m/sec is 6.3 kHz , which should fix the low end of the acoustic resonance spectrum in the cell.

Search for supersolidity in low-frequency sound experiments

Several flexible membranes have been used, made of 7.5 μm thick Kapton coated with a thin superconducting film of either Al or Nb. The membrane is electrostatically actuated by applying between it and ground an *ac* voltage of up to 7 volts rms superposed to a *dc* bias of typically 150 volts. The corresponding force per unit area, of the order of 1 Pa, is much weaker than in other experiments probing solid ^4He .⁶

The displacement of the diaphragm is measured with an electrodynamic sensor using a *dc*-SQUID as front-end amplifier to achieve a sensitivity of $\sim 10^{-15}$ m, significantly higher than in other attempts to observe supersolidity in ^4He , apart possibly from torsional oscillator experiments.

3. Experimental observations

We have observed low frequency non-linear resonances that constitute anomalous features in the sense that they appear below a sample-dependent onset temperature T_r and that their frequencies are too low to be usual acoustic resonances. These resonances have not been observed in a pure solid ^3He sample. When the ^4He samples, which are obtained by cooling along the melting curve at constant volume, are grown and cooled very gently, these resonances are either weak or even not seen. Efforts to produce ^4He samples that would show reproducible features in a reproducible manner have so far failed. In all likelihood, the solid sample ends up at low temperature badly fractured, which greatly affects its low-frequency stress-strain response. Slowly raising and lowering the temperature while remaining in the hcp phase changes, or even suppresses, these resonances.

Such a resonance is shown in Fig.3. The displacement of the flexible membrane when the frequency is swept through resonance at constant excitation drive level is plotted in terms of the frequency (i) for various temperatures (left frame) at the $\times 70$ drive level; (ii) for various drive levels at 12.6 mK (right frame). When the temperature is raised, the resonance amplitude decreases, the width increases and the frequency shifts upward. At 90 mK, the resonance features are lost in the baseline corrections uncertainties; the resonance disappears completely above 90 mK.

When the drive level increases, the resonance amplitude also increases but not in proportion to the drive, the resonance frequency shifts downward in frequency, the width increases and the shape becomes distorted. The non-linear behaviour does not appear to set in very abruptly. At low drive level and low temperature, the resonance is fairly sharp, with a quality factor Q of the order of 100.

The data shown in Fig. 3. were obtained after a fast cooldown from

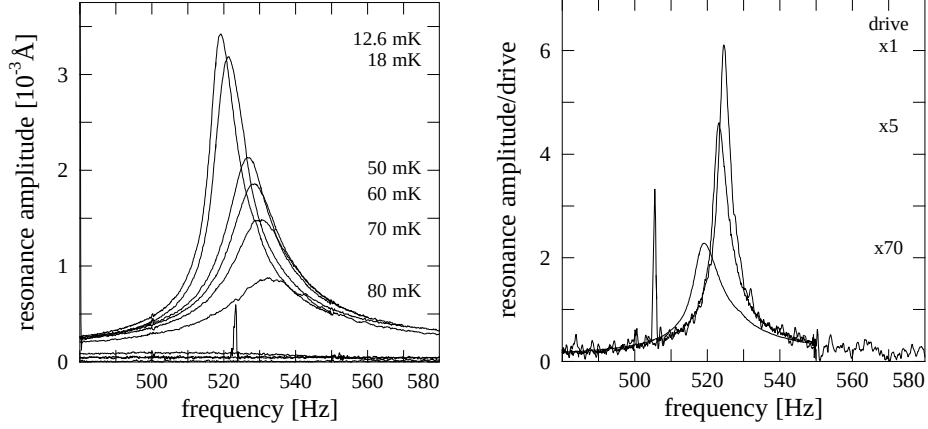


Fig. 2. (left) Resonance amplitude, corrected for the baseline, approximately in Angström with an uncertainty of less than 30%, *vs* frequency, in Hz, for several temperatures. The bottom curves are at 90, 100, 110, and 120 mK and no resonance can be separated from noise and baseline correction errors; (right) Resonance amplitude, corrected for the baseline, divided by drive amplitude in arbitrary units *vs* frequency, in Hz, for the relative drive levels $\times 1$, $\times 5$, and $\times 70$. Sharp glitches due to spurious noise can be seen in both frames. The left frame is for the highest excitation level.

1 K. The solid was formed by the blocked capillary method starting from a pressure of 47 bars at a temperature of 2.3 K with nominal purity ^4He containing typically 1 part in 10^7 of ^3He impurities. Besides the resonance at 524 Hz shown in the figure, weaker resonances were also seen at 593, 808, 924, 1088, and 1392 Hz. These resonances are attached to a particular sample configuration and usually remain unchanged as long as the temperature is kept well below 1 K although some slow relaxation was occasionally observed at low temperature. Raising the temperature above 1 K and cooling again gives a different sample configuration, resulting in a different set of resonance frequencies and a different onset temperature. Low frequency resonances have been observed up to above 700 mK. When cooling very slowly from 1.5 K, these features are either weak or completely absent.

4. Discussion

The sample-history dependence of the low-frequency resonances is most probably linked to the polycrystalline state that forms in the solid when

Search for supersolidity in low-frequency sound experiments

it is cooled in the fixed volume container. Thermal gradients develop and the solid sample breaks under thermal stress. Annealing becomes very slow below ~ 1.2 K and the defects created during the cool-down remain frozen.

It has been known for some time¹⁰ that layers of superfluid liquid persist at pressures up to 50 bars in very small pores of Vycor glass while two amorphous solid layers are adsorbed on the glass surface and solid forms in the bulk of the pores. This type of interfacial superfluidity has been observed by Yamamoto *et al.*¹¹ in pores as small as 2.5 nm, in which superfluidity has been observed up to 35 bars at low temperature.

It has been suggested by Beamish¹² and by Dash and Wettlaufer¹³ that such superfluid layers may provide mechanical decoupling between the ^4He solid and the torsional oscillator walls and be a possible explanation for experiments of Kim and Chan.^{1,2} This slip mechanism would however not explain why defects in the bulk of the crystal sample appear to play an important role in the moment-of-inertia anomaly.⁵

A number of authors have pointed out that a perfect crystal can not possess off-diagonal long range order, a result established by Penrose and Onsager in 1952.¹⁴ It was then speculated that the superfluid layers forming at the grain boundaries in a polycrystalline sample could play a major role in the supersolidity.^{15,16,17}

It seems quite possible that the stress-strain anomalies of solid ^4He formed at constant volume reported here are related to the existence of pre-melted superfluid films at grain boundaries. According to Dash and Wettlaufer, the non-crystalline interface between grains may have a thickness of 4~8 atomic layers.¹³ A fraction only of these layers forms a 2D-superfluid, the rest being amorphous solid. A Kosterlitz-Thouless transition temperature $T_{\text{KT}} \sim 0.1$ K in ^4He film at saturated vapour pressure would correspond to an equivalent superfluid fraction of 3% of an atomic layer.¹⁸ The critical velocity of such a dilute 2D-superfluid is in the range of a few cm/s.¹⁹ If actual superflow is thought to take place, this would imply that there are many interfaces in parallel and that the grains are very small, in the range of 1 to 10 μm in size. In such a case, the properties of this solid-superfluid slurry would be more homogeneous than the wide variation of resonance frequencies and onset temperatures would let think.

If there are indeed fewer crystallites, the pressure change induced by the membrane can still be transmitted in the superfluid layers by fourth sound, the velocity of which is, at low temperature, of the order of the first sound velocity in the bulk. In the very dilute Bose condensate, first sound velocity is low. It is expressed in terms of the scattering length a_0 and the condensate number density n_0 by $c = (2\pi\hbar/m_4)\sqrt{n_0 a_0/\pi}$, $\hbar$ being the Planck constant and m_4 the atomic mass of ^4He .²⁰ Taking a_0 of the order of the hard core

Yu. Mukharsky, O. Avenel, E. Varoquaux

radius of the ^4He atomic potential ($2.5 \text{ \AA}$) yields an estimate of 27 m/s for the layer in which 3 % of the atoms are in the condensate, a value low enough to account for the observed resonances. The frequency also depends on the geometry of the actual path between grains. So far, no systematic pattern of behaviour for frequencies and critical temperatures has emerged in our experiments.

To conclude, we have observed low frequency resonance modes that depend on the presence of defects in the solid ^4He sample. This observation brings evidence that there exists a component of the sample that transmits low velocity, low dissipation pressure waves through the sample. The superfluid layers that are believed to coat the grain boundaries may constitute such a component.

We acknowledge useful correspondence with John Reppy and Sébastien Balibar.

REFERENCES

1. E. Kim and M. Chan, *Nature* **427**, 225 (2004).
2. E. Kim and M. Chan, *Science* **305**, 1942 (2004).
3. K. Shirahama, M. Kondo, S. Takada, and Y. Shibayama, *Bull. Am. Phys. Soc.* (2005).
4. M. Kubota *et al*, *ScienceNow* (2006), quoted by A. Cho in the issue of March 15.
5. A.-S. Rittner and J. Reppy, Arxiv preprint cond-mat/0604528, 2006.
6. J. Day and J. Beamish, *Phys. Rev. Lett.* **96**, 105304 (2006).
7. S. Balibar, private communication.
8. O. Avenel and E. Varoquaux, *Jpn. J. Appl. Phys.* **26**, 1798 (1987).
9. E. Varoquaux, O. Avenel, and M. Meisel, *Can. J. Phys.* **65**, 1377 (1987).
10. C. Lie-zhao, D. F. Brewer, C. Girit, E. N. Smith, and J. D. Reppy, *Phys. Rev. B* **33**, 106 (1986).
11. K. Yamamoto, H. N. Y. Shibayama, and K. Shirahama, *Phys. Rev. Lett.* **93**, 075302 (2004).
12. J. Beamish, *Nature (London)* **427**, 204 (2004).
13. J. Dash and J. Wettlaufer, *Phys. Rev. Lett.* **94**, 235301 (2005).
14. O. Penrose and L. Onsager, *Phys. Rev.* **104**, 576 (1956).
15. E. Burovski, E. Kozik, A. Kuklov, N. Prokof'ev, and B. Svistunov, *Phys. Rev. Lett.* **94**, 165301 (2005).
16. N. Prokof'ev and B. Svistunov, *Phys. Rev. Lett.* **94**, 155302 (2005).
17. S. Khairallah and D. Ceperley, Superfluidity of dense ^4He in vycor, arXiv:physics/0502039 - 8 Feb. 2005.
18. I. Rudnick, *Phys. Rev. Lett.* **40**, 1454 (1978).
19. K. Gillis, S. Volz, and J. Mochel, *Phys. Rev. B* **40**, 6684 (1989).
20. M.-O. Mewes *et al.*, *Phys. Rev. Lett.* **77**, 988 (1996).